### THE HEART OF A KUMA



#### COMFORT

She was right. With forced air furnaces, only the air is conditioned, so convection heat that warms your entire environment. The walls, floors and air warm up to provide a cozy home.



### SAVING ENERGY AND SAVING DOLLARS

Kuma's hybrid burn system takes wood burning efficiency to new heights. With 78% HHV\* efficiency, investing in a Kuma wood stove will save you really add up. Plus, All Kuma stoves qualify for a 30% federal tax credit through the year 2032.



#### BEAUTY FOLLOWS PERFORMANCE

soul of a Kuma is to deliver the performance that you need:

- High Efficiency
- Long Burn Time



#### QUALITY AMERICAN CRAFTSMANSHIP

made by one craftsman, start to finish. No assembly lines. Not assembled with a hand-made product. All wood stoves have precision laser cut steel and come



#### CLEAN AND EFFICIENT EHYBRID, TECHNOLOGY

Efficiency: The efficiency of a stove tells you what percent of your wood is being converted into usable heat for your home. With a Kuma, HHV efficiency is taken to the highest levels ever seen in modern wood stoves. The second is low missions: Low emissions mean less smoke and unwanted pollution in your less carbon monoxide emissions than most modern wood stoves.


HHV EFFICIENCY - Always ask to see the High Heat Value (HHV) efficiency of any appliance that you are researching. This value is published by the US Environmental Protection Agency and is a true representation of how your stove will perform in







# **Ashwood LE-1 Cambridge LE-1** Wood Classic LE-1

|   | CLEARANCES FOR ALL K-<br>251 MODELS | Single Wall Connector | Double Wall Connector |  |  |  |
|---|-------------------------------------|-----------------------|-----------------------|--|--|--|
| Α | Back wall to pipe edge              | 15″                   | 10"                   |  |  |  |
| В | Back wall to stove                  | 11.5″                 | 7″                    |  |  |  |
| C | Side wall to pipe edge              | 24.5″                 | 23.5″                 |  |  |  |
| D | Side wall to stove                  | 14.5″                 | 14"                   |  |  |  |
| Е | Side walls to pipe edge             | 15″                   | 14.5″                 |  |  |  |
| F | Side wall to stove                  | 5″                    | 5″                    |  |  |  |
| G | Hearth to stove side                | 6"                    | 6"                    |  |  |  |
| Н | Hearth to stove face                | 16"                   | 16"                   |  |  |  |
| · |                                     |                       |                       |  |  |  |







Type 1 Hearth (No R-Value Required)

#### What does hybrid mean?

Our stoves combine 2 distinct burn systems into the firebox each with their own unique advantages. The first is the thermal combustion system (burn tubes). Burn tubes work great at temperatures above 1000° delivering secondary combustion air to incinerate most of the smoke. The second is the catalytic combustor system which lowers the temperature at which wood smoke will burn down to 500° so on medium and low burn rates, hybrid stoves will continue to burn super clean and efficient. Our entire line of low emission hybrid stoves and inserts comply with EPA 2020 requirements.

rev. 240206

#### Authorized Dealer:





Featuring a high-flow durable all metal combustor that removes in seconds for easy maintenance

### K-251 SERIES

## **Wood Burning Stoves**

With EHYBRID Technology





# Wood Classic LE-

Shown with an ash pan pedestal and a pewter door.

Based on our original and well loved Wood Classic model, the Wood Classic LE-1 continues on the tradition as a hard working home heater. Looks that salute the classic American hearth are combined with an ultra effective re-burn system.

The ash tree is among the very best of woods for home heating. Our Kuma Ashwood LE-1 lives up to its name in providing you with the very best in quality, features and performance. Designed for those who rely on it as their principal heat source, the Ashwood LE-1 is well equipped to be an enduring addition to your home.

# Ashwood LE-1

Shown with steel legs and a black door

The Kuma Cambridge LE -1 is a stove that is up to the job. This robust heater stands ready to provide an abundance of warmth in response to the coldest of winter's days. Stylish and sensible, the efficient and clean burning Cambridge LE-1 is built to last a lifetime.

Cambridge LE-1

Shown with a pewter door

**Optional Door** Upgrades




Pewter



Flue Size

Weight




450 lbs.

**Burn Time** Wood Length **Heating Capacity Firebox Size Emissions CO** Emissions 0.49 grams/min.

Outside air ready

Variable speed blower option

30% Tax Credit Qualified\*\*

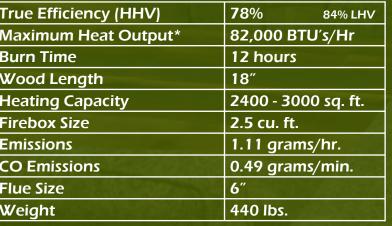

EPA 2020 certified

UL Safety tested

Pedestal and ash pan options

Variety of leg styles

Manufactured home approved

Outside air ready

ber, this stove will produce an EPA estimated 30,612 BTU's/Hr. Larger or more frequent loads of cord wood will produce 82,000 BTU's/Hr.

Additionally, a stoves performance will vary depending on wood density, chimney length, home layout, and your home's insulation value

\*\*Sec. 25(C) - renewable energy investment tax credit. Please consult with your tax adviser to confirm your eligibility for a tax credit

Variable speed blower option

30% Tax Credit Qualified\*\*

| True Efficiency (HHV) | <b>78</b> % 84% LHV |
|-----------------------|---------------------|
| Maximum Heat Output*  | 82,000 BTU's/Hr     |
| Burn Time             | 12 hours            |
| Wood Length           | 18"                 |
| Heating Capacity      | 2400 - 3000 sq. ft. |
| Firebox Size          | 2.5 cu. ft.         |
| Emissions             | 1.11 grams/hr.      |
| CO Emissions          | 0.49 grams/min.     |
| Flue Size             | 6"                  |
| Weight                | 470 lbs.            |

Wood storage area

Modern European design

UL Safety tested

EPA 2020 certified

"Live grate" ash pan system included

Manufactured home approved

Outside air ready

Variable speed blower option

30% Tax Credit Qualified\*\*

|                |             |            |                              | 13   |                             |
|----------------|-------------|------------|------------------------------|--|-----------------------------|
| 1              |             |            |                              | True Efficiency (HHV)  | 78% 84% LHV                 |
|                |             |            |                              | Maximum Heat Output* Burn Time   | 82,000 BTU's/Hr<br>12 hours |
|                |             |            | Classic step top design      | Wood Length  | 18"                         |
| HHV)           | 78%         | 84% LHV    | EPA 2020 certified           | Heating Capacity   | 2400 - 3000 sq. ft.         |
| Output*        | 82,000 B    | TU's/Hr    |                              | Firebox Size   | 2.5 cu. ft.                 |
|                | 12 hours    |            | UL Safety tested             | Emissions  | 1.11 grams/hr.              |
|                | 18"         |            | Pedestal and ash pan options | CO Emissions   | 0.49 grams/min.             |
| у              | 2400 - 30   | 00 sq. ft. | Variety of leg styles        | Flue Size  | 6"                          |
| 1              | 2.5 cu. ft. |            |                              | Weight   | 440 lbs.                    |
| 1.11 grams/hr. |             | ns/hr.     | Manufactured home approved   |  |                             |
|                | 0.40        |            | Outside air ready            | 4 The boson of Contains the adding to the contains the co |                             |